

Z18 upate watch UI resouce tutorial Z18 更新手表 UI 资源教程

If you turn on smart watch show as below screen, so need update UI resource.
如果手表开机显示如下画面，你需要更新 UI 资源，步骤如下。1-13



First you need download the UI resource files. The UI resource file URL:

<http://www.app2open.com/download/res/Z18/res-V1.01.30/Z18ResTool.zip>

首先下载对应的工具资源，下载网址：

<http://www.app2open.com/download/res/Z18/res-V1.01.30/Z18ResTool.zip>

1. Click the OK area at the bottom of the smartwatch, and the screen shows as follows:
点击上图 OK 按钮，画面显示如下。



2. Make sure Charge button is selected.
确保 Charge 按钮被选中。
3. Find the cable to connect the smartwatch to the computer's USB port.
找到数据线，连接手表与电脑 USB 端口。
4. At this point, run eaglecom.exe, this application locat diskshow folder.
找到 eaglecom.exe 应用程序并运行，位置在 diskshow 文件夹下。
5. Select Serial port (COMx : USB Serial port) as follow, and click open button. The button will show green color. this moment, select COM3.
选择串口(COMx : USB Serial port)如下图，点选 open 按钮，按钮将变成绿色。此时选择 COM3




- Find 2 button as follow, double-click this 2 button, the application will show OK tip on the left.
If the OK prompt character is not displayed on the left,

Please replace the serial port selection (COM4: USB serial port) according to step 5. If the selection is correct, The smartwatch will reboot automatic restart.

找到 2 号按钮如下图，双击 2 号按钮，此应用程序左边会显示 OK 提示字符。如果左边未显示 OK 提示字符，请按步骤五更换串口选择(COM4 : USB Serial port)，

如果选择正确，此时手表将自动重启。

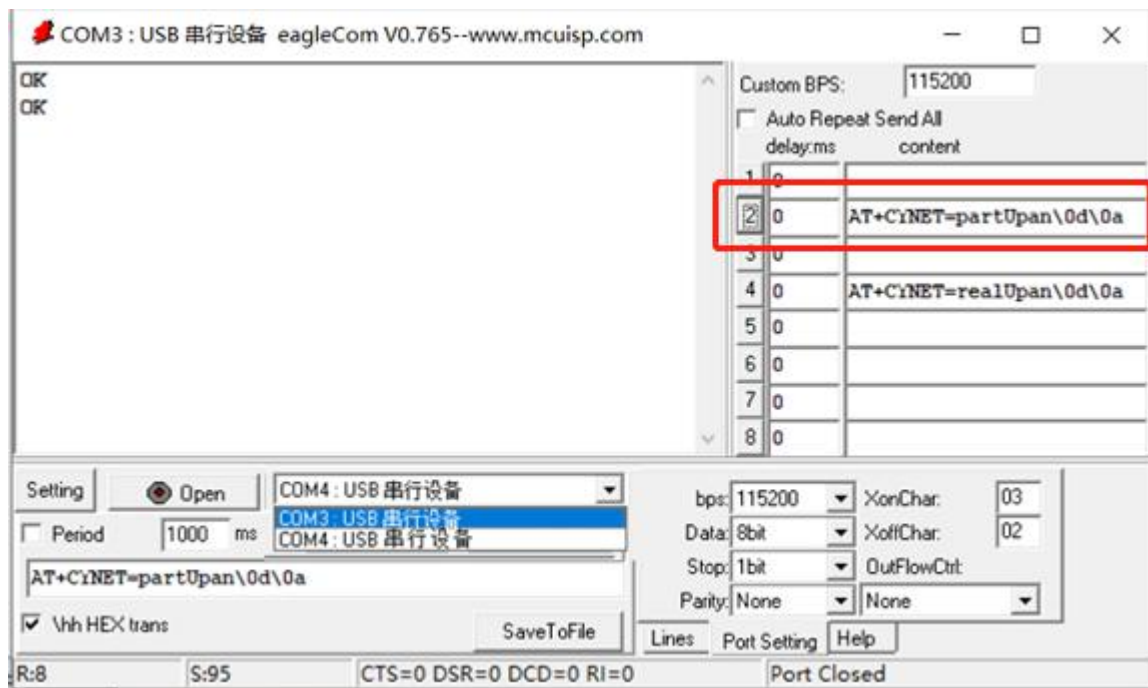


- The smartwatch will show No UI resource screen, click OK button, select Charge button is select. Reference setp 1.

此时手表显示无 UI 资源界面， 点击 OK 按钮，并选中 Charge 按钮，参开步骤 1.

- Repeat step 5. at this time find 4 button as follow, doule-click 4 button, the application will show OK tip on the left.

重复步骤 5，此时找到 4 按钮并双击，如下图，应用程序左边将显示 OK 提示字符。

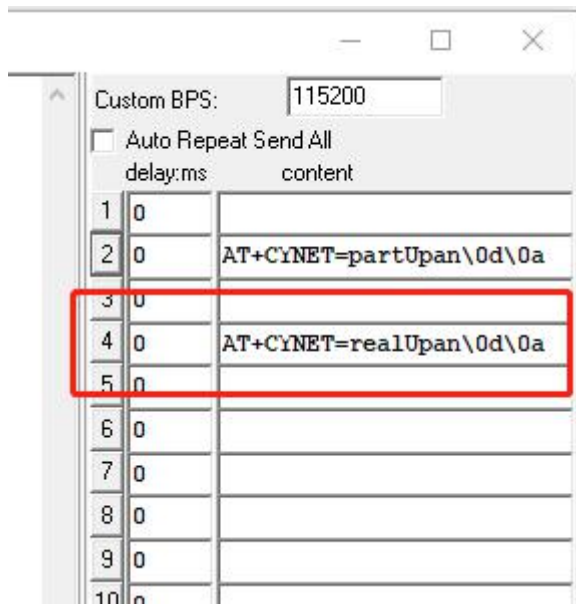

- at this time, select Mass Storage buton on the smartwatch as follow, This is important. The computer will show two disk.

此时，在手表上选中 Mass Storage 按钮，如下图，这步很重要。电脑上将新增两个盘。



- Find CopyUI.exe locat ResCopy folder, doule-click the appliction, it will automatic configure resources. Wait for the app display to end.

找到 CopyUI.exe 应用程序，位于 ResCopy 文件夹下，双击运行，将自动配置手表资源，并等待显示结束。

- Disconnect the data cable, and long press the smart watch power key for restart smartwatch.

断开数据线，长按手表开关机键，重启手表即可。

- END. Enjoy it.

结束。